REMOVE EXISTING CATCH BASIN AND CONSTRUCT COMBINATION MANHOLE / TYPE 'C' BASIN

MATCH LINE SEE DWG. C-2

Down River Rd.

NEW CROSSWALK STRIPING ACROSS STREET INTERSECTION

REMOVE EXISTING CATCH BASIN AND CONSTRUCT NEW MANHOLE. CONSTRUCT NEW TYPE 'C' CB OVER EXISTING PIPE (V.I.F. EXISTING SIZE). CONNECT TO NEW MANHOLE WITH SHORT SECTION OF 12" HDPE PIPE.

REMOVE EXISTING CATCH BASIN AND CONSTRUCT NEW MANHOLE. CONSTRUCT NEW TYPE 'C' CB AND CONNECT TO MANHOLE WITH SHORT SECTION OF 12" HDPE PIPE

TAPER WALK AS SHOWN TO AVOID EXIST. TREE

PROTECT EX. TREES IN PLACE (TYP.)

PROTECT IN PLACE EXISTING TREE

REMOVE EXISTING CATCH BASIN AND CONSTRUCT NEW MANHOLE. CONSTRUCT NEW TYPE 'C' CB AND CONNECT TO MANHOLE WITH SHORT SECTION OF 12" HDPE PIPE

Main Street

MATCH LINE SEE BELOW

NEW GRANITE STONE CURBING (TYP.)

4" DOUBLE YELLOW STRIPE ON CENTER LINE OF ROADWAY

THEORETICAL CURBLINE, SOUTH SIDE OF STREET

RESET EXIST. MH FRAME TO MEET NEW GRADE

Woodland Road

Elm Place

MATCH LINE SEE ABOVE

PROTECT EXIST. TREES AND SHRUBS (TYP.)

MEET EX. WALK FLUSH

PLACE 4" DOUBLE YELLOW STRIPE ON CENTERLINE OF STREET

REMOVE EX. TREE

4" WHITE LINE 45' LONG

PAINTED PAVEMENT MARKINGS (WHITE)

STA. 30+75± 12" STOP BAR (WHITE)

Main Street

Old Norwalk Road

Farm Road

NOTE: NORTH BOUND LANE WIDTH VARIES FROM 13' AT STA. 30+00 TO 18' AT STA. 30+75 AS SHOWN

REMOVE EXISTING STOP BAR AND CENTER LINE STRIPING

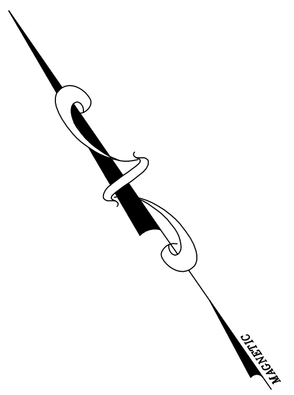

GRAPHIC SCALE

30 0 15 30 60 120

(IN FEET)
1 inch = 30 ft.

FOR REVIEW ONLY

NO.	REVISIONS / DESCRIPTION	DATE

Civil Design Associates LLC
1450 Barnum Avenue - Suite 202
Bridgeport, CT 06610
Tele: (203) 330-8700 · Fax: (203) 330-8701

MAIN STREET SIDEWALK IMPROVEMENT PROJECT

MAIN STREET BETWEEN OAK STREET AND FARM ROAD

- PREPARED FOR -

TOWN OF NEW CANAAN, DEPARTMENT OF PUBLIC WORKS
77 MAIN STREET, NEW CANAAN, CONNECTICUT

PRELIMINARY SITE PLAN - 3

DESIGNED BY CAD	SCALE 1" = 30' - 0"	DATE 14 JULY 2008	
DRAWN BY CAD	CADD FILE ...08-13\MAIN ST SIDEWALKS\SITE PLAN.DWG		C-3
JOB NO. CDA #08-13	SHEET 3 OF 3 SHEETS		